



[Click HERE to return to the Table of Contents](#)

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

338 REMINGTON ULTRA MAGNUM

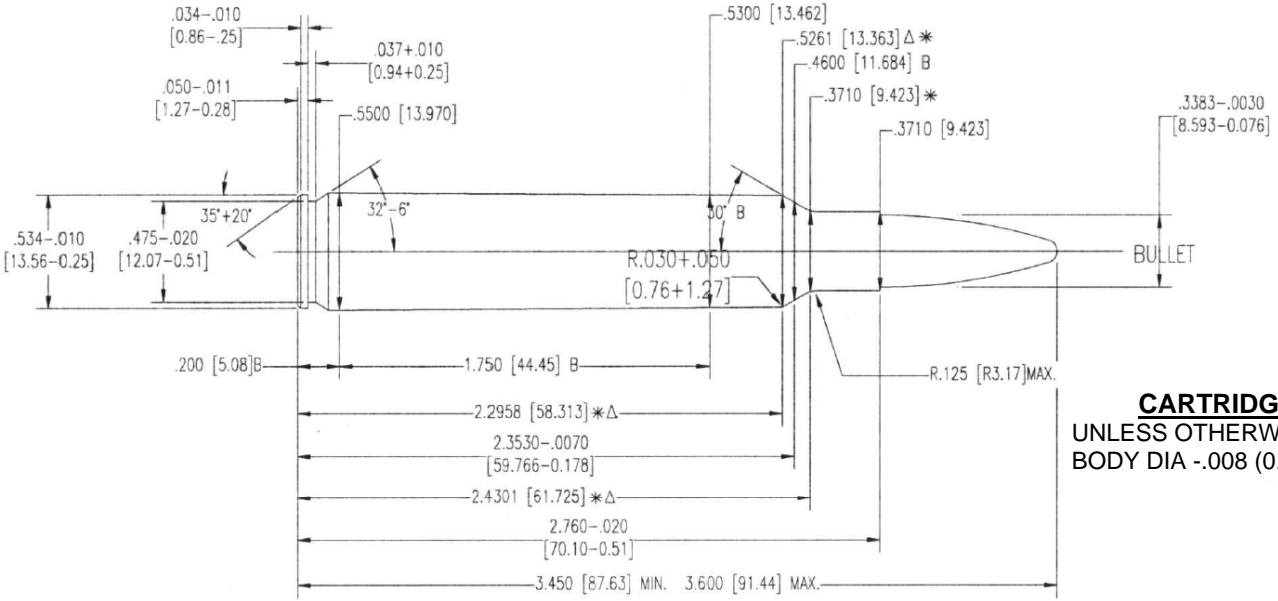

CARTRIDGE
UNLESS OTHERWISE NOTED
BODY DIA -.008 (0.20)

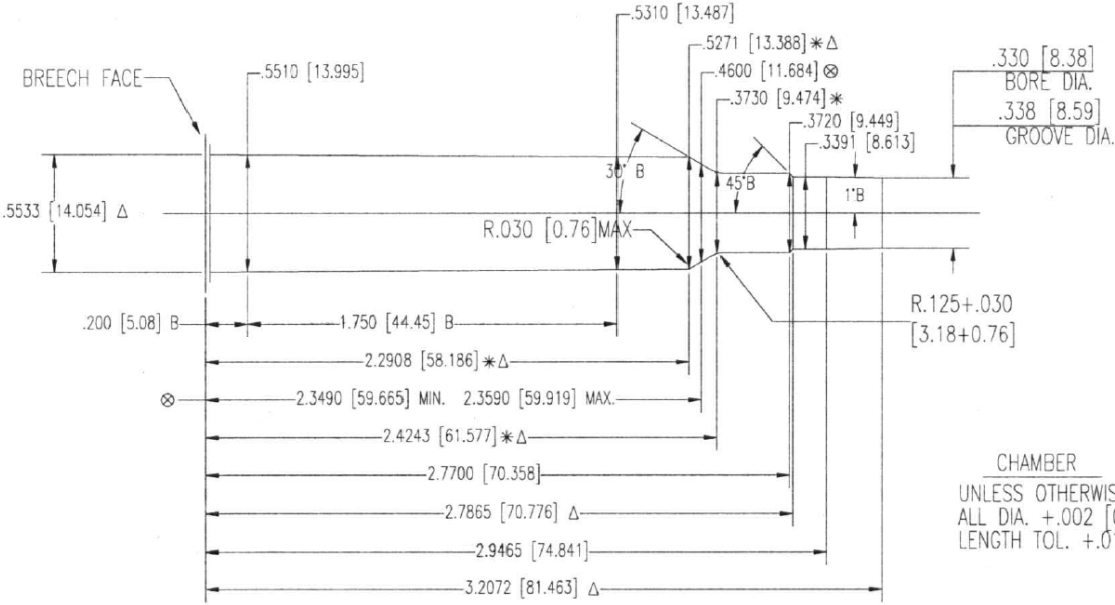

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA. +.002 [0.05]
LENGTH TOL. +.015 [0.38]

NOTE:
B=BASIC
[XX.XX]=MILLIMETERS
⊗ = HEADSPACE DIMENSION
Δ = REFERENCE DIMENSION
* DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

Δ 6 GROOVES
Δ .110+.002 [2.79+0.05] WIDE
TWIST: 10[254] R.H. OPTIONAL
MIN. BORE & GROOVE
AREA: .0882 SQ. IN. [56.903 mm²]